


**1****5**

# Sealed Blind Rivet CERTO®

## Copper / Steel Dome Head -closed-

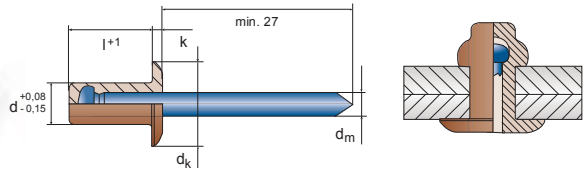

d	l+1		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>3,2</b>	6,5	0,5 – 2,0	6,0 ± 0,3	1,1 ± 0,15	1,7	10.905.032.065	500
	8,0	1,5 – 3,5				10.905.032.080	500
	9,5	3,0 – 5,0				10.905.032.095	500
	12,5	4,5 – 8,0				10.905.032.125	500

[2.0040] 3,3 mm 950 N 1250 N

d	l+1		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>4,0</b>	8,0	0,5 – 3,5	8,0 ± 0,4	1,3 ± 0,2	2,2	10.905.040.080	500
	10,0	3,0 – 5,0				10.905.040.100	500

[2.0040] 4,1 mm 1400 N 2100 N


d	l+1		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>4,8</b>	9,5	1,0 – 5,0	9,5 ± 0,4	1,7 ± 0,2	2,7	10.905.048.095	500
	11,5	4,5 – 6,5				10.905.048.115	500

[2.0040] 4,9 mm 2150 N 3200 N

▶ Please note our manifold range of **assortments and small packs** on [pages 104/105 and 106-108!](#)**1****5**

# Sealed Blind Rivet CERTO®

## Copper / Stainless steel A2/A3 Dome Head -closed-

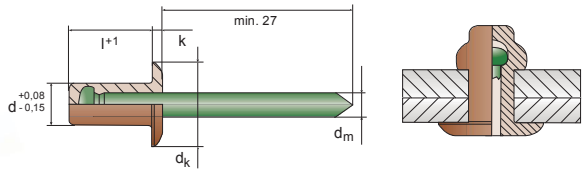

d	l+1		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>3,2</b>	6,5	0,5 – 2,0	6,0 ± 0,3	1,1 ± 0,15	1,7	10.906.032.065	500
	8,0	1,5 – 3,5				10.906.032.080	500
	9,5	3,0 – 5,0				10.906.032.095	500
	12,5	4,5 – 8,0				10.906.032.125	500

[2.0040] 3,3 mm 950 N 1250 N

d	l+1		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>4,0</b>	8,0	0,5 – 3,5	8,0 ± 0,4	1,3 ± 0,2	2,2	10.906.040.080	500
	10,0	3,0 – 5,0				10.906.040.100	500

[2.0040] 4,1 mm 00 N 2100 N

d	l+1		d <sub>k</sub>	k	d <sub>m</sub>	No.	
<b>4,8</b>	9,5	1,0 – 5,0	9,5 ± 0,4	1,5 ± 0,2	2,7	10.906.048.095	500
	11,5	4,5 – 6,5				10.906.048.115	500

[2.0040] 4,9 mm 50 N 3200 N

### Common handling advice:

Various trials have shown that, during practical deployment, **CERTO®** connections feature excellent jet-proofness. If you need a hydraulic seal or if there is a build up of certain media (e.g. in drainage pipes), an additional seal between the rivet body and component borehole shall be necessary.

Upon request, **CERTO®** sealed blind rivets can be provided with an additional seal (Neopren® washer). Look at ▶ [page 112](#) for details.

