









Aluminium / Stainless Steel Large Dome Head -open -painted head



d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
5,0	8,0	2,0 – 5,0	11,0 ± 0,5	1,5 + 0,4	2,7	10.742.050.080/k	500
	10,0	4,0 – 6,5				10.742.050.100/k	500
	12,0	6,0 – 8,0				10.742.050.120/k	500
	14,0	7,5 – 10,0				10.742.050.140/k	500
	16,0	8,0 – 12,0				10.742.050.160/k	500
	18,0	11,5 – 13,5				10.742.050.180/k	500
	20,0	12,0 – 15,5				10.742.050.200/k	500


EN AW - 5754 [AlMg3]  5,1 mm  1650 N  2500 N

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
5,0	10,0	4,0 – 6,5	14,0 ± 0,3	1,5 + 0,4	2,7	10.762.050.100/k	500
	12,0	6,0 – 8,0				10.762.050.120/k	500
	14,0	7,5 – 10,0				10.762.050.140/k	500
	16,0	8,0 – 12,0				10.762.050.160/k	500
	18,0	11,5 – 13,5				10.762.050.180/k	500
	20,0	12,0 – 15,5				10.762.050.200/k	500
	25,0	15,0 – 20,5				10.762.050.250/k	250

EN AW - 5754 [AlMg3]  5,1 mm  1650 N  2500 N

! The individual premium painting available even in smaller quantities.


- Minimum quantity only 1.000 pieces
- Short delivery times
- **Mandrel remains unpainted to avoid contamination of the tool.**
- Precise definition of colour is required
- Alternative plastic cover caps on [▶ page 112](#)
- Special storefront nosepieces on [▶ page 138](#)

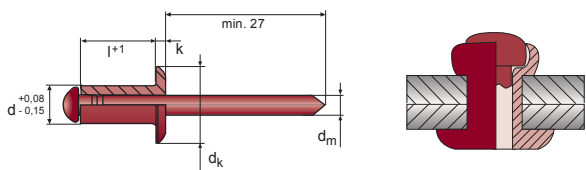





Aluminium / Aluminium Dome Head -open-




DIN EN ISO 15981







d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
3,2	6,0	0,5 – 4,0	6,5 - 0,7	0,8 ± 0,2	2,0	10.701.032.060	500
	8,0	3,5 – 6,0				10.701.032.080	500
	10,0	5,0 – 8,0				10.701.032.100	500

EN AW - 5251 [AlMg2]  3,3 mm  380 N  670 N

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
4,0	6,0	1,0 – 3,5	8,0 - 1,0	1,0 ± 0,3	2,5	10.701.040.060	500
	8,0	3,0 – 5,5				10.701.040.080	500
	10,0	5,0 – 7,0				10.701.040.100	500
	12,0	6,5 – 9,0				10.701.040.120	500
	16,0	8,5 – 12,5				10.701.040.160	500

EN AW - 5251 [AlMg2]  4,1 mm  740 N  1240 N

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
4,8	8,0	1,0 – 5,0	9,5 - 1,0	1,1 ± 0,3	2,9	10.701.048.080	500
	10,0	4,0 – 7,0				10.701.048.100	500
	12,0	6,0 – 8,5				10.701.048.120	500
	14,0	8,0 – 10,5				10.701.048.140	500
	16,0	8,0 – 12,0				10.701.048.160	500
	18,0	11,5 – 13,0				10.701.048.180	500
	20,0	13,0 – 15,0				10.701.048.200	500

EN AW - 5251 [AlMg2]  4,9 mm  1140 N  1600 N