


Standard Blind Rivet ALFO®

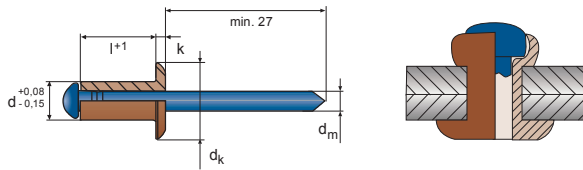

Copper / Steel
Dome Head -open-

ALFO®

DIN EN ISO 16582

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
3,0	5,0	0,5 - 2,5	6,3 -0,7	0,8 ±0,2	1,9	10.705.030.050	500
	6,0	2,0 - 3,0				10.705.030.060	500
	8,0	3,0 - 5,0				10.705.030.080	500
	10,0	5,0 - 7,0				10.705.030.100	500
	12,0	7,0 - 9,0				10.705.030.120	500

[2.0040] 3,1 mm 760 N 950 N

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
4,0	6,0	2,5 - 3,5	8,0 -1,0	1,0 ±0,3	2,0	10.705.040.060	500
	8,0	3,5 - 5,0				10.705.040.080	500
	10,0	5,0 - 7,0				10.705.040.100	500
	12,0	7,0 - 8,5				10.705.040.120	500
	16,0	8,0 - 12,5				10.705.040.160	500

[2.0040] 4,1 mm 1500 N 1800 N


d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
3,2	5,0	0,5 - 2,5	6,4 -0,5	0,8 ±0,2	1,9	10.705.032.050	500
	6,0	2,0 - 3,5				10.705.032.060	500
	8,0	3,0 - 5,5				10.705.032.080	500
	10,0	5,0 - 7,0				10.705.032.100	500

[2.0040] 3,3 mm 800 N 1000 N

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
4,8	8,0	2,0 - 4,0	9,5 -1,0	1,1 ±0,3	2,7	10.705.048.080	500
	10,0	4,0 - 6,0				10.705.048.100	500
	12,0	6,0 - 8,0				10.705.048.120	500
	14,0	8,0 - 10,0				10.705.048.140	500
	16,0	10,0 - 12,0				10.705.048.160	500

[2.0040] 4,9 mm 2000 N 2500 N

Standard Blind Rivet ALFO®

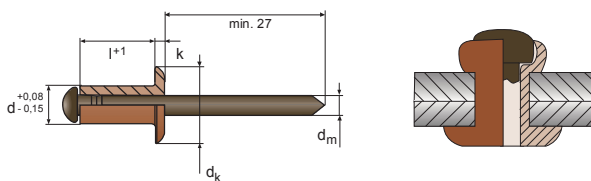

Copper / Bronze
Dome Head -open-

DIN EN ISO 16582

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
3,0	5,0	0,5 - 2,5	6,3 -0,7	0,8 ±0,2	1,7	10.709.030.050	500
	6,0	2,0 - 3,5				10.709.030.060	500
	8,0	3,0 - 5,5				10.709.030.080	500
	10,0	5,0 - 7,0				10.709.030.100	500

[2.0040] 3,1 mm 760 N 950 N

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
4,0	6,0	2,0 - 3,5	8,0 -1,0	1,0 ±0,3	2,0	10.709.040.060	500
	8,0	3,0 - 5,5				10.709.040.080	500
	10,0	5,0 - 7,0				10.709.040.100	500
	12,0	6,5 - 8,5				10.709.040.120	500
	16,0	8,0 - 11,5				10.709.040.160	500

[2.0040] 4,1 mm 1500 N 1800 N

d	l+1	$\frac{\downarrow}{\uparrow}$	dk	k	dm	No.	
3,2	5,0	0,5 - 2,5	6,4 -0,5	0,8 ±0,2	1,9	10.709.032.050	500
	6,0	2,0 - 3,5				10.709.032.060	500
	8,0	3,0 - 5,5				10.709.032.080	500
	10,0	5,0 - 7,0				10.709.032.100	500

[2.0040] 3,3 mm 800 N 1000 N

► Please note our manifold range of **assortments and small packs** on **pages 104/105 and 106-108!**

